




Yamato

Dataweigh Ω TM

INNOVATION IN MOTION

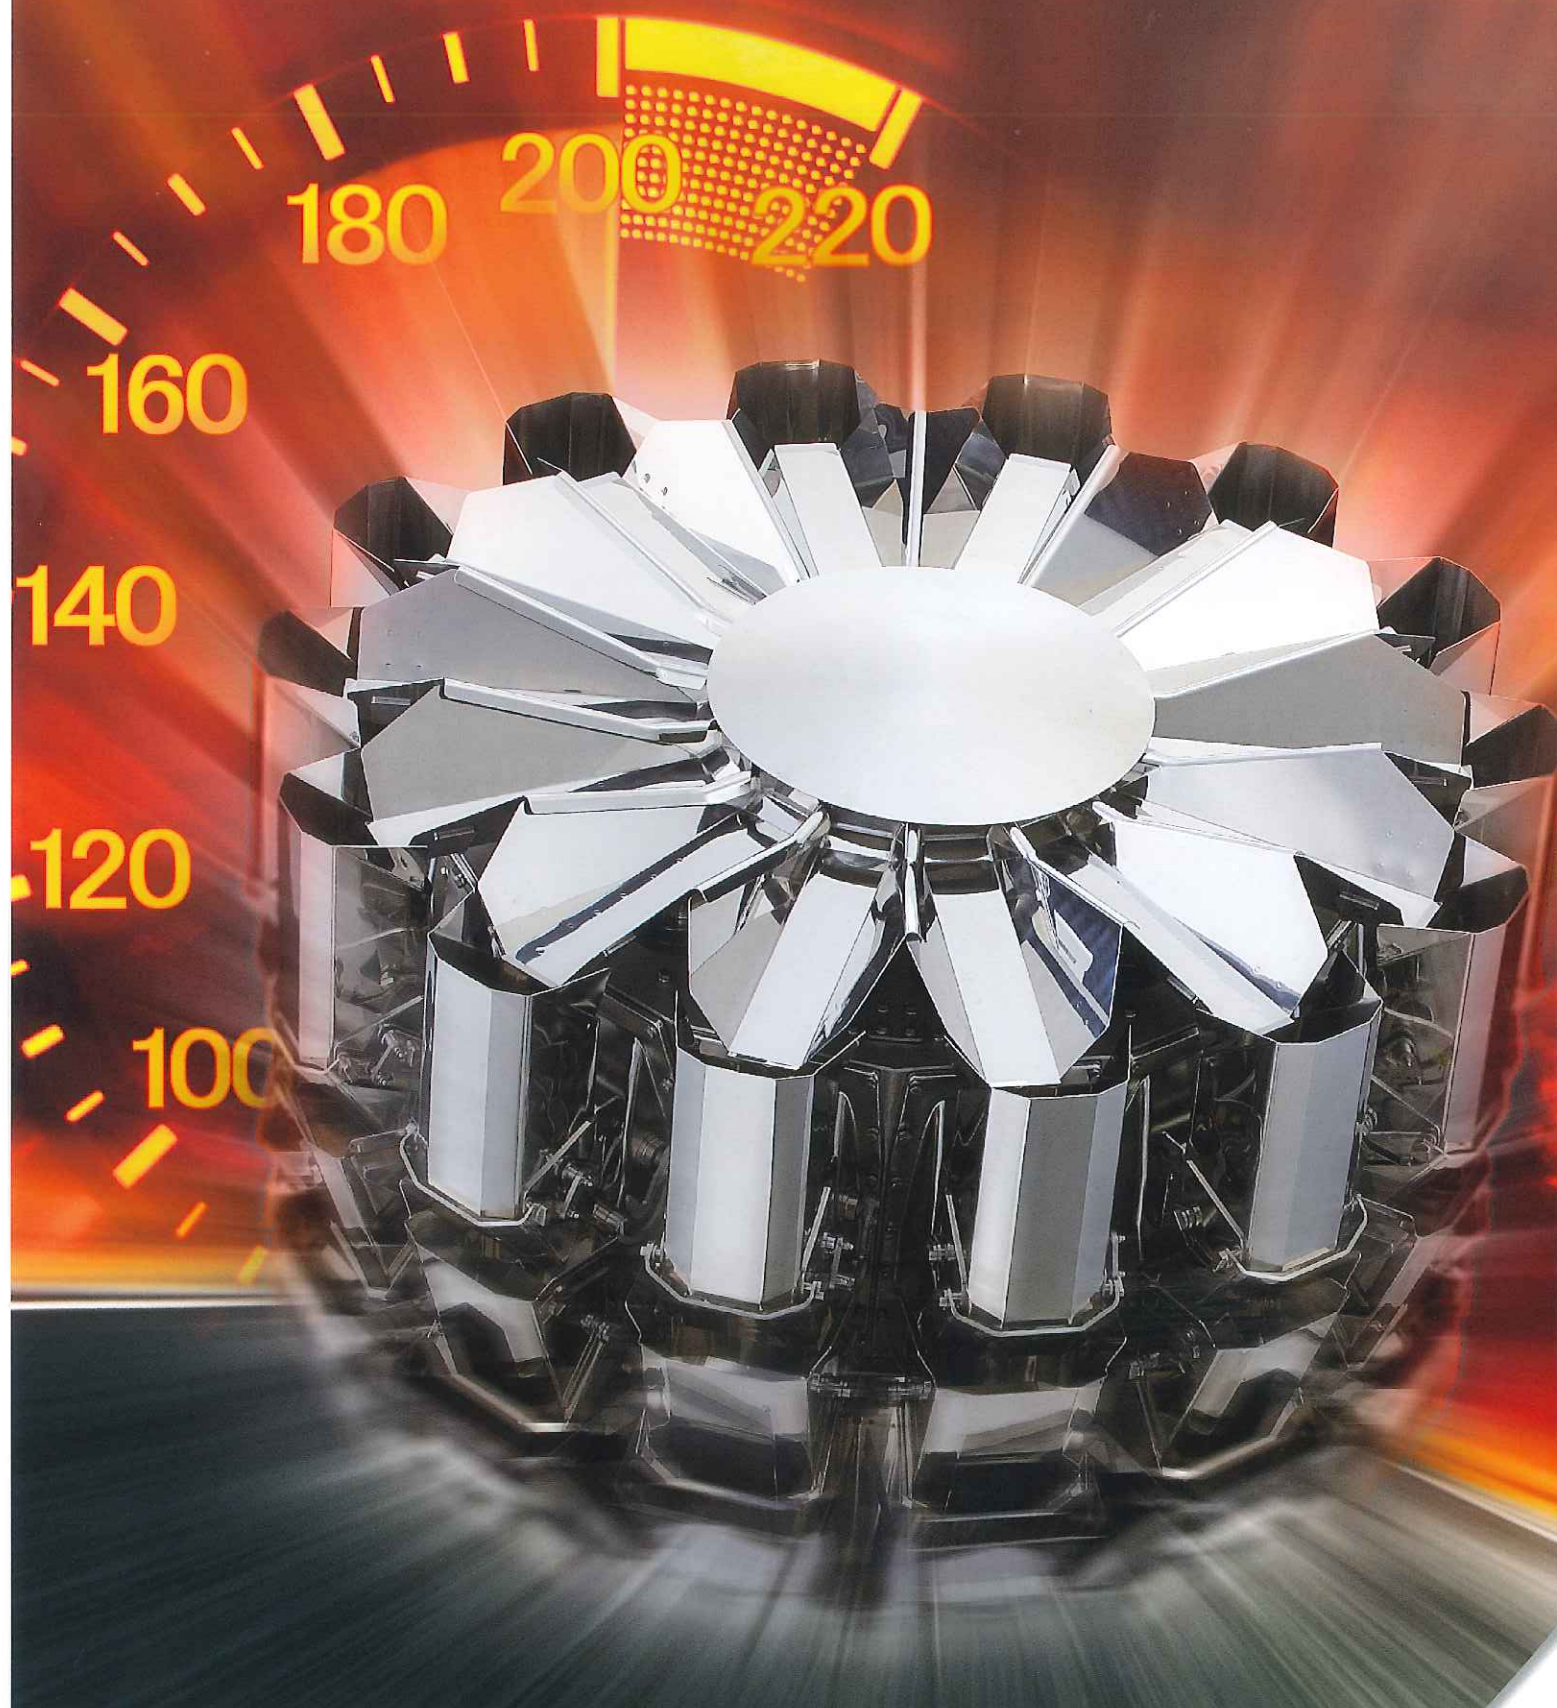

INNOVATION IN MOTION

Dataweigh Ω TM

Yamato has been at the leading edge of weighing technology for almost 90 years. "Dataweigh Omega"TM series utilizes groundbreaking multihead weighing technology. **PATENT PENDING**

● IMPROVING PRODUCTIVITY
200wpm High speed

*The above speed is for 14H double shift operation.

● EASY OPERATION
Auto-tuning
for optimum control

● FOOD SAFETY

Easy to clean

WATERPROOF

IP67 | Best Sanitation Structure

● EASY MAINTENANCE Quick recovery and minimum downtime

● ENVIRONMENTAL RESPONSIBILITY

60%less Reduced power consumption





“Dataweigh Omega”™ Series introduces innovative technology that is first in the world. This completely new multihead weigher provides customers with great benefits for productivity, operation, maintenance, food safety and environmental responsibility.

Increased productivity

Higher output and yield

- High-natural-frequency load cells minimize vibration impacts.
- Lattice digital filters reduce the influence of external vibrations and ensure higher weighing accuracy.
- Dual cell system eliminate low frequency vibrations.
- Toggle-less gating mechanisms reduce mechanical impacts on load cells and suppress bucket gating noise.
- Individually adjustable collating chute angles maximize product discharge speed.
- Auto-tuning and Yamato AFC (automatic feeding control) ensure continuous optimum product flow.

Food safety

Best sanitation structure

- Simplified fully stainless steel streamlined design.
- Seamless YDB bucket* design leaves no spaces for dust or bacterial growth.

*Yamato Diffusion Bonding (YDB) buckets are used in specific models.

Easy to clean

- Compliant with IP67.
- Polygon-shaped bucket facilitates cleaning.

Ease of maintenance

- Improved design ensures easy replacement of actuators and feeders.
- No tools are needed to remove buckets and linear feeder pans.
- Enhanced protection of load cells can withstand up to 150 kg.

Improved troubleshooting

- Simple screen diagnostics allow quick identification of problem areas.
- Part replacement time indicators prevent possible failures.

Environmental responsibility

- Feedback control of feeders can achieve up to 60% power consumption reduction.*
- Wider product windows reduce sealing errors and contribute to reducing packaging waste.

*Compared to a conventional model



Optimum control of product flow



Individual collating chute



YDB bucket



Streamlined main body




Polygon-shaped feed and weigh buckets



Unitization of actuator and feeder

Easily removable and attachable buckets

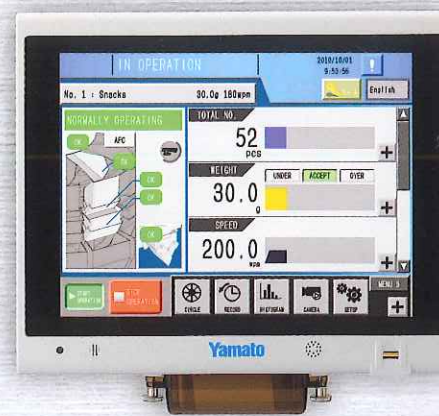


Easy Operation

- Auto-tuning, feeder amplitude and bucket gating set automatically, ensuring continuous optimal product flow
- Image-scanning with built-in cameras prevents program selection mistakes.
- Barcode readers use built-in cameras.
- Login management uses fingerprint authentication.
- Built-in operation manual

Network Remote Control and Data Acquisition

Network connection capabilities (optional)

- PC remote control by LAN
- OPC & COM interface for data accumulation
- Feedback control between checkweigher and multihead weigher
- Troubleshooting and FAQs available in AICC+ support section of Yamato website

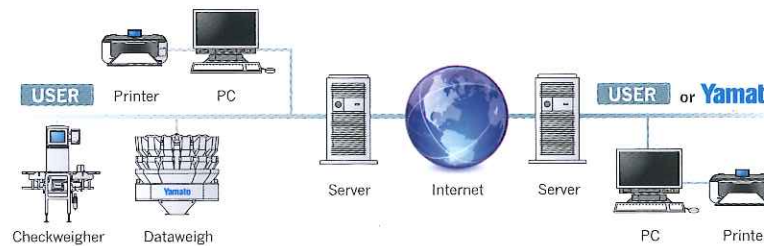

“Dataweigh Omega”™ series models

| Model | Weigh Heads | Max. weighing range (g) | Volume per pack (ml) | Max. speed (wpm) | Max. discharge points | Dimensions | |
|---------|-------------|-------------------------|----------------------|------------------|-----------------------|------------|-------------|
| | | | | | | Width (mm) | Height (mm) |
| 0-0114S | 14 | 500 | 1,000 | 210 | 1 | 800 | 950 |
| 0-0116M | 16 | 500 | 1,000 | 240 | 2 | 1,000 | 1,300 |
| 0-0120S | 20 | 500 | 1,000 | 210 | 2 | 1,100 | 1,150 |
| 0-0124M | 24 | 500 | 1,000 | 300 | 4 | 1,300 | 1,350 |
| 0-0132S | 32 | 500 | 1,000 | 420 | 4 | 1,800 | 1,650 |
| 0-0132M | 32 | 500 | 1,000 | 420 | 4 | 1,800 | 1,650 |
| 0-0310S | 10 | 1,000 | 3,000 | 100 | 1 | 1,200 | 1,400 |
| 0-0312M | 12 | 1,000 | 3,000 | 140 | 2 | 1,200 | 1,500 |
| 0-0314S | 14 | 1,000 | 3,000 | 200 | 1 | 1,200 | 1,250 |
| 0-0316M | 16 | 1,000 | 3,000 | 220 | 2 | 1,600 | 1,650 |
| 0-0320S | 20 | 1,000 | 3,000 | 200 | 2 | 1,600 | 1,750 |
| 0-0320M | 20 | 1,000 | 3,000 | 250 | 2 | 1,600 | 1,750 |
| 0-0324M | 24 | 1,000 | 3,000 | 300 | 4 | 1,800 | 1,950 |
| 0-0610S | 10 | 2,000 | 6,000 | 85 | 1 | 1,400 | 1,450 |
| 0-0614S | 14 | 2,000 | 6,000 | 170 | 1 | 1,400 | 1,500 |
| 0-0616M | 16 | 2,000 | 6,000 | 220 | 2 | 1,600 | 1,650 |
| 0-0620S | 20 | 2,000 | 6,000 | 170 | 2 | 1,800 | 1,550 |
| 0-0620M | 20 | 2,000 | 6,000 | 220 | 2 | 1,800 | 1,950 |
| 0-0624M | 24 | 2,000 | 6,000 | 300 | 4 | 2,000 | 2,200 |
| 0-1214S | 14 | 3,000 | 12,000 | 130 | 1 | 1,600 | 1,900 |
| 0-1220S | 20 | 3,000 | 12,000 | 130 | 2 | 2,100 | 2,400 |
| 0-1814S | 14 | 5,000 | 18,000 | 100 | 1 | 1,800 | 2,000 |

Above specifications and dimensions are subject to change without notice.

AICC+


Advanced Interactive Command Console Plus (RCU-1000)

This powerful new interactive command console provides easy access to all operational functions.

- 12.1-inch Color Touchscreen
- 300 Programs
- USB access port
- Built-in Printer
- 16 Languages
- Fingerprint authentication
- Ethernet access port
- Built-in Camera



Automatic operation display



Built-in operation manual



Maintenance information display

Optional Features

- Counting Software
- Mixing Software
- Product Inspection Camera*
- Priority head
- Multi-point Discharge

*CCD camera for real-time product monitoring on top cone and linear feeder pans

Mixing Application

- Yamato's mix applications, which use a high-speed combination calculation system, can mix up to 8 different products on one weigher.
- Dataweigh Omega's mixing software handles a wide range of combination calculations. It optimizes among different product groups to achieve the best mix with high accuracy of individual components, for a total package weight.



Wide variety of weighing applications



Maximizing packaging performance

Dataweigh Ω ™
Frontier/Divided Weigher

Benefits of "Dataweigh Omega"™ Frontier

Maximize production output

- Increase productivity through high-speed multipoint discharge
- Minimize production waste through wider product window
- Small footprint

Increase packaging versatility


- VFFS (duplex, triplex, 4-tube, 6-tube) versatility
- Applicable to multi-point horizontal packaging machines and multi-lane tray lines

Contribute to environmental protection


- Reduce packaging waste and weight
- Lower total cost of ownership

Providing various discharge patterns

"Dataweigh Omega"™ Frontier series offers various types of discharge patterns

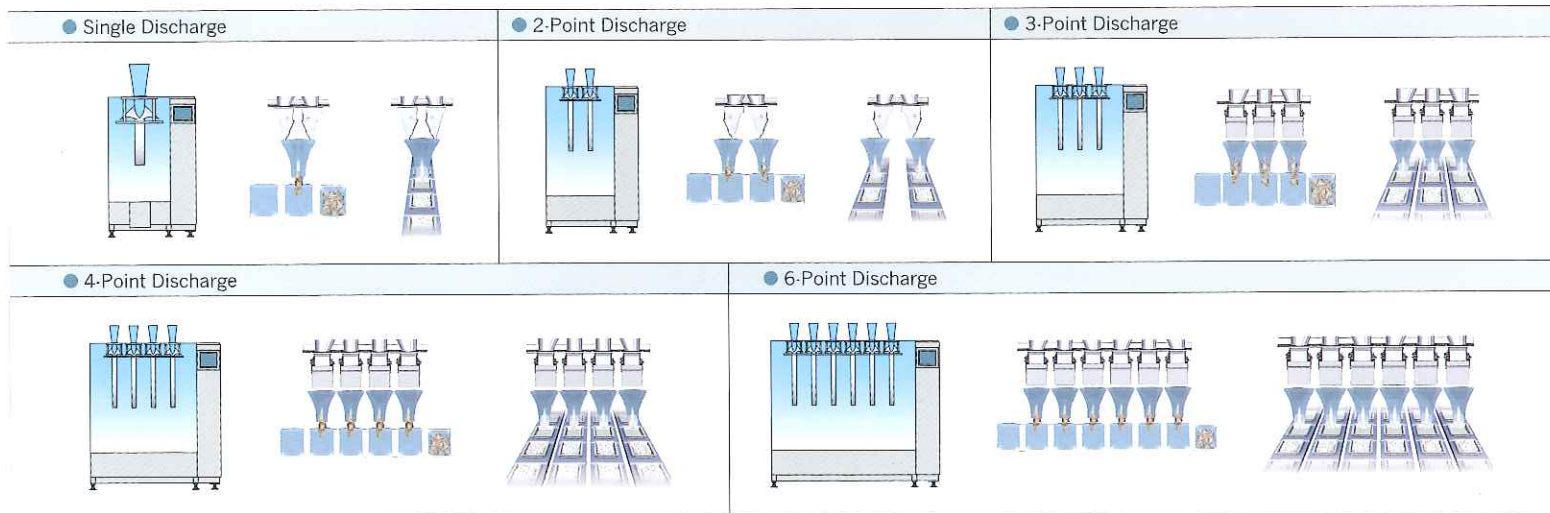

Expanding packaging flexibility

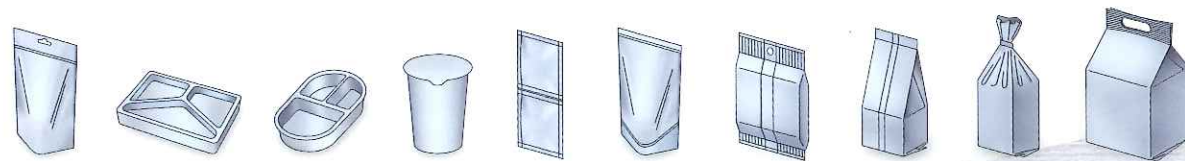


ADW-O-0132F

INNOVATION IN MOTION


Independent Discharge Channels

Changing from a standard single chute structure to a dual chute structure provides wider product discharge windows in high-speed operation.

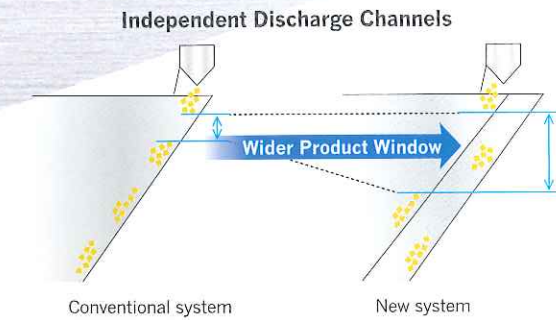

Bottom Based Handling Device (BBHD)

The bottom based handling system temporarily retains the product that has dropped to the discharge chutes and on release ensures that no product is within the seal zone of the bag-maker. This reduces product waste and allows the use of thinner packaging film with ensuring sufficiently sealing time.

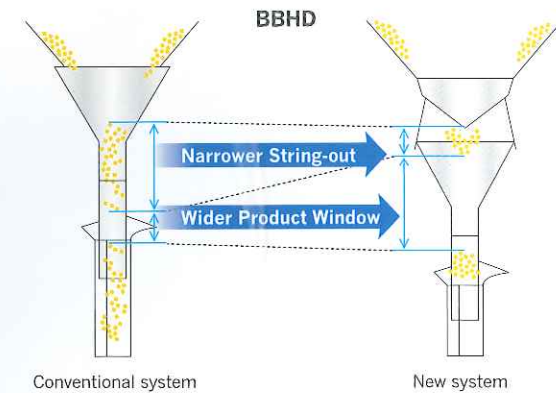

Simultaneous combination


High accuracy and output are realized. Less loss means a fast return-on-investment.

Multi-point Discharge

Yamato Multihead weighers with 1 to 6 discharge gates can fill tray lines, cup lines, HFFS, VFFS, rotary packing machines and other similar packaging applications. Multipoint discharge allows increased production.

Divided Weigher


Divided weigher is comprised of completely independent discharge channels divided from one weigher, allowing weighing with higher speed and accuracy. Wider product windows with BBHD maximize multihead weigher performance in high-speed small bag lines.

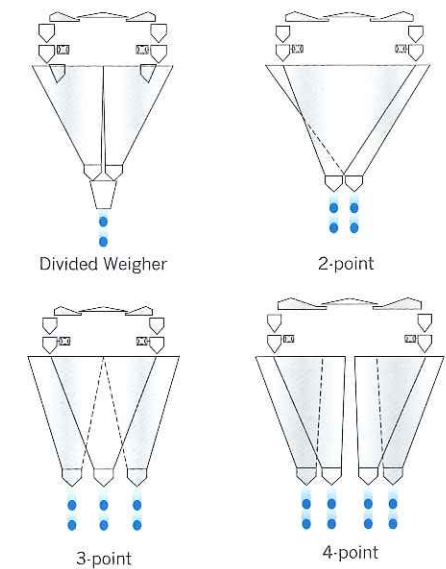

"Dataweigh Omega"™ Frontier series models

| | Model | Weigh Heads | Max. weighing range (g) | Volume per pack (ml) | Max. speed (wpm) | Max. discharge points | Dimensions | |
|---------------------------------|---------|-------------|-------------------------|----------------------|------------------|-----------------------|------------|-------------|
| | | | | | | | Width (mm) | Height (mm) |
| Dataweigh Omega Frontier series | 0-0114F | 14 | 500 | 1,000 | 210 | 2 | 800 | 1,500 |
| | 0-0120F | 20 | 500 | 1,000 | 315 | 3 | 1,100 | 1,500 |
| | 0-0128F | 28 | 500 | 1,000 | 420 | 4 | 1,500 | 2,000 |
| | 0-0132F | 32 | 500 | 1,000 | 630 | 6 | 1,800 | 2,000 |
| | 0-0314F | 14 | 1,000 | 3,000 | 200 | 2 | 1,200 | 1,700 |
| | 0-0320F | 20 | 1,000 | 3,000 | 300 | 3 | 1,600 | 1,900 |
| | 0-0614F | 14 | 2,000 | 6,000 | 170 | 2 | 1,400 | 1,800 |

Above specifications and dimensions are subject to change without notice.



About Yamato & Dataweigh™

Yamato Scale Co., Ltd. was founded in 1922 and has always been a leading manufacturer in the world of weighing machinery. In 1979, the first Dataweigh ADW-110 was developed. Since then, we have introduced many groundbreaking technologies, creating today's high-speed and highly accurate multihead weigher 'Dataweigh Series', which is used throughout the world. Our headquarters are in Akashi, Japan, and we have regional offices in the U.S.A., Canada, Germany, Netherlands, U.K., France, Russia, China and India. We also have a joint-venture in Korea and cover more than 70 countries with our representatives. Our highly experienced sales and service network provides customers around the world a high level of expertise and service.

■ On-site-service



Installation



Application



Training

■ In-house-service



Repairs




Maintenance



Helpdesk & hotline

Worldwide Sales & Service Network

Yamato is the only manufacturer of multihead weighers with wholly owned operations in America, Europe and Asia.

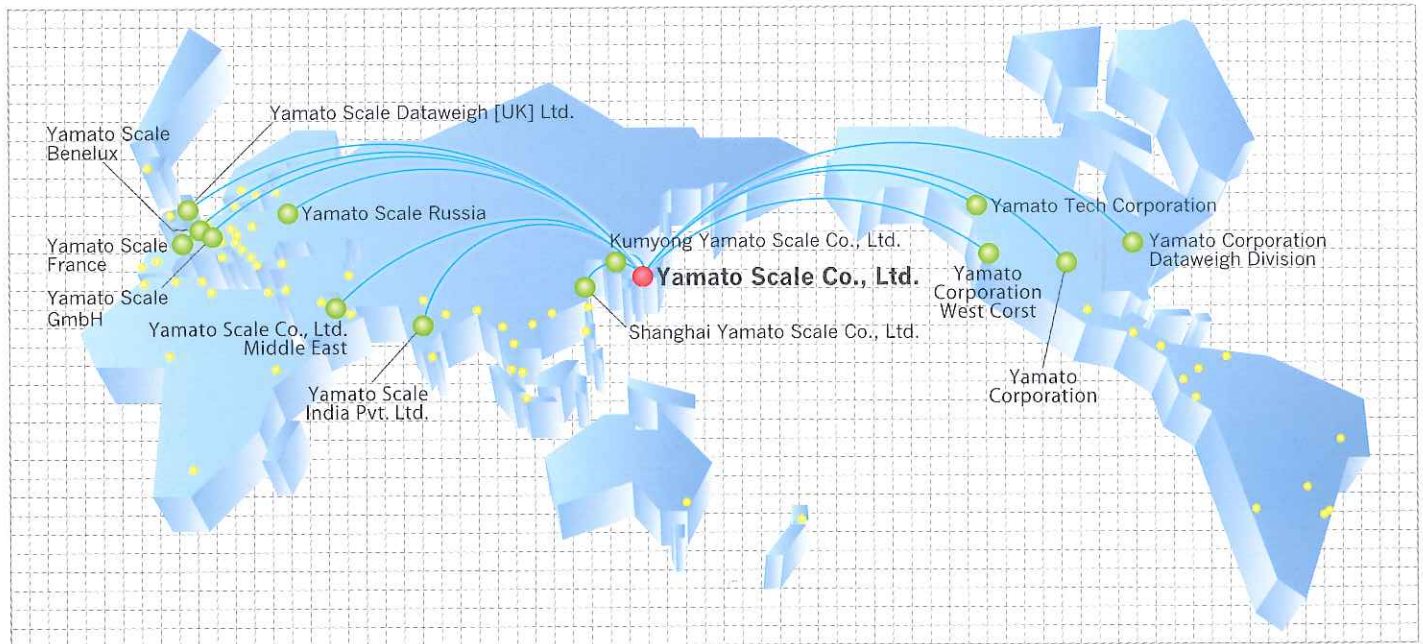

Spare Parts & Service

Yamato Spare Parts and Service are subject to the same high demands of quality as the machines themselves.



Speed, weight and volume listed are standard. Other ranges are also available when required, please contact Yamato.

This machine is covered by number of patents worldwide.

All illustrations and specifications are subject to change without notice.

YAMATO SCALE CO., LTD.

5-22 Saenba-cho, Akashi, Japan 673-8688
 Telephone: +81(78)918-5566-5567-5568
 Telefax: +81(78)918-5552
 URL: <http://www.yamato-scale.co.jp/>

Yamato Corporation Dataweigh Division

6306 W. Eastwood Court
 Mequon, WI 53092 U.S.A.
 Telephone: +1(262)236-0000
 Telefax: +1(262)236-0036
 URL: <http://yamatoamericas.com/>
 E-mail: info@yamatoamericas.com

Yamato Corporation-West Coast

Suite 1205 22600F Lambert Street
 Lake Forest, CA 92630
 Telephone: +1(949)238-4500
 URL: <http://www.YamatoAmericas.com>

Yamato Scale GmbH

Hanns-Martin-Schleyer-Str. 13,
 D-47877 Willich, Germany
 Telephone: +49(0)2154 9159-0
 Telefax: +49(0)2154 40626
 URL: <http://www.yamatoscale.com/>
 E-mail: sales@yamatoscale.com

Yamato Scale France

3 Avenue du Canada, Bâtiment Gamma,
 91940 LES ULIS, France
 Telephone: +33(0)1 64 53 24 40
 Telefax: +33(0)1 69 07 26 79
 URL: <http://www.yamato.fr/>
 E-mail: Ventes@yamato.fr

Yamato Scale Dataweigh [UK] Ltd.

3 Maple Park, Lowfields Avenue, Leeds,
 LS12 6HH, England
 Telephone: +44(0)113 322 1546
 Telefax: +44(0)113 350 2020
 URL: <http://www.yamatoscale.co.uk/>
 E-mail: sales@yamatoscale.co.uk

Yamato Scale India Pvt. Ltd.

D-22/1, Okhla Industrial Area, Phase II,
 New Delhi - 110020, India
 Telephone: +91(0)11 4607 2882
 Telefax: +91(0)11 4607 2881

Yamato Scale Russia

Lublinskaya str. 151, of. 339
 109341 Moscow, Russia
 Telephone: +7(495)620 4870
 Telefax: +7(495)620 4877
 URL: <http://www.yamatoscale.ru/>
 E-mail: salesru@yamatoscale.com

Yamato Scale Benelux

Edisonstraat 4a, 5051 DS, Goirle,
 The Netherlands
 Telephone: +31(0)13 220 11 17
 Telefax: +31(0)13 460 90 81
 URL: <http://www.yamatoscale.nl/>
<http://www.yamatoscale.be/>
 E-mail: ysb@yamatoscale.com

Shanghai Yamato Scale Co., Ltd.

368, Qingda Road, Heqing Industrial Field,
 Pudong, Shanghai, ZIP code 201201, China
 Telephone: +86(21)58973377
 Telefax: +86(21)58973737
 URL: <http://www.yamatosh.com>

Yamato Scale Co., Ltd. Middle East (Branch)

Dubai Airport Freezone
 LIU-A07, P.O Box : 371911
 Telephone: +971(0)42952730
 Telefax: +971(0)42952729
 E-mail: yamato@yme-01.ae